

# SC-CWW18/36 SC-HWW18/36

# RA-WASHER™

## Description

RA-WASHER™ is a power LED projection lighting product. It uses 18 or 36 power 1W LEDs as the light sources. It has 256 grey rates color changing patterns with accurate and uniform light distribution. The projecting angle and position are alternative so the best light effects can be achieved.

## Application

- bars, restaurants, clubs, hotels, stages
- historical and modern buildings
- museums, art galleries
- sculptures and plastic arts

## Features

Standard length=1000mm(40") and 500mm(20")  
 Material & finish=powder painted anodized aluminum Rated power=45W and 22W  
 Projection distance 0-30m  
 Working temperature range -40°C~+40°C  
 Average working temperature=+42°C  
 Life Time 50,000 hours


Cree LED VERSION



Edsion LED VERSION



## Specifications

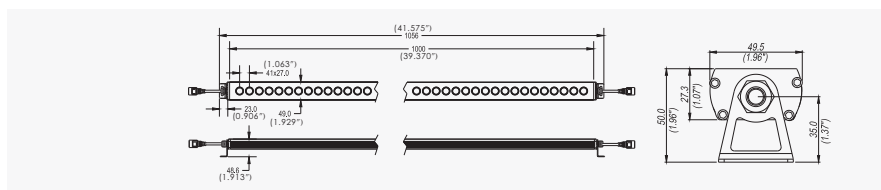

Model Number	Color	LED Type	lumen (lm)	Beam Angle (degrees)	CCT/Wave	Voltage	Max.Current (A)	Power (W)	IP	Weight (KG)	Projecting Distance (meters)
SC-HWW18-W	White	1W Edison LED	1380	8/12/30/45/60	5500-7000K	24V DC	0.9	22	65	1	15-30
SC-HWW18-WW	warm white		1260	8/12/30/45/60	2700-3200K	24V DC	0.9	22	65	1	15-30
SC-HWW18-NW	Natural white		1300	8/12/30/45/60	4000-4500K	24V DC	0.9	22	65	1	15-30
SC-HWW18-R	Red		900	8/12/30/45/60	620-630nm	24V DC	0.625	15	65	1	15-30
SC-HWW18-G	Green		1170	8/12/30/45/60	520-535nm	24V DC	0.9	22	65	1	15-30
SC-HWW18-B	Blue		360	8/12/30/45/60	465-475nm	24V DC	0.9	22	65	1	15-30
SC-HWW18-Y	Yellow		900	8/12/30/45/60	585-595nm	24V DC	0.625	15	65	1	15-30
SC-HWW18-RGB	RGB		840	8/12/30/45/60	/	24V DC	0.9	22	65	1	15-30
SC-HWW36-W	White		2400	8/12/30/45/60	5500-7000K	24V DC	1.87	45	65	2.2	15-30
SC-HWW36-WW	WarmWhite		2100	8/12/30/45/60	2700-3200K	24V DC	1.87	45	65	2.2	15-30
SC-HWW36-NW	Natural white		2200	8/12/30/45/60	4000-4500K	24V DC	1.87	45	65	2.2	15-30
SC-HWW36-R	Red		1800	8/12/30/45/60	620-630nm	24V DC	1.25	30	65	2.2	15-30
SC-HWW36-G	Green		2340	8/12/30/45/60	520-535nm	24V DC	1.87	45	65	2.2	15-30
SC-HWW36-B	Blue		720	8/12/30/45/60	465-475nm	24V DC	1.87	45	65	2.2	15-30
SC-HWW36-Y	Yellow		1800	8/12/30/45/60	585-595nm	24V DC	1.25	30	65	2.2	15-30
SC-HWW36-RGB	RGB		2140	8/12/30/45/60	/	24V DC	1.87	45	65	2.2	15-30